


1. PART NO : R4D1945P30A1

2. ELECTRICAL SPECIFICATION

ITEM	SPEC	UNIT
Center Frequency(Fo)	1945	MHz
Band Width(BW)	1930~1960	MHz
Insertion Loss	3.0	dB max
Ripple	0.5	dB max
Return Loss	18.0	dB min
ATTENUATION  (absolute value)	at 1870MHz	45.0 dB min
	at MHz	dB min
	at MHz	dB min
	at MHz	dB min
Operation Temperature Range	-30 ~ +80	℃
Input Power	2.0 max	W
In / Out Impedance	50	Ω

3. DIMENSION

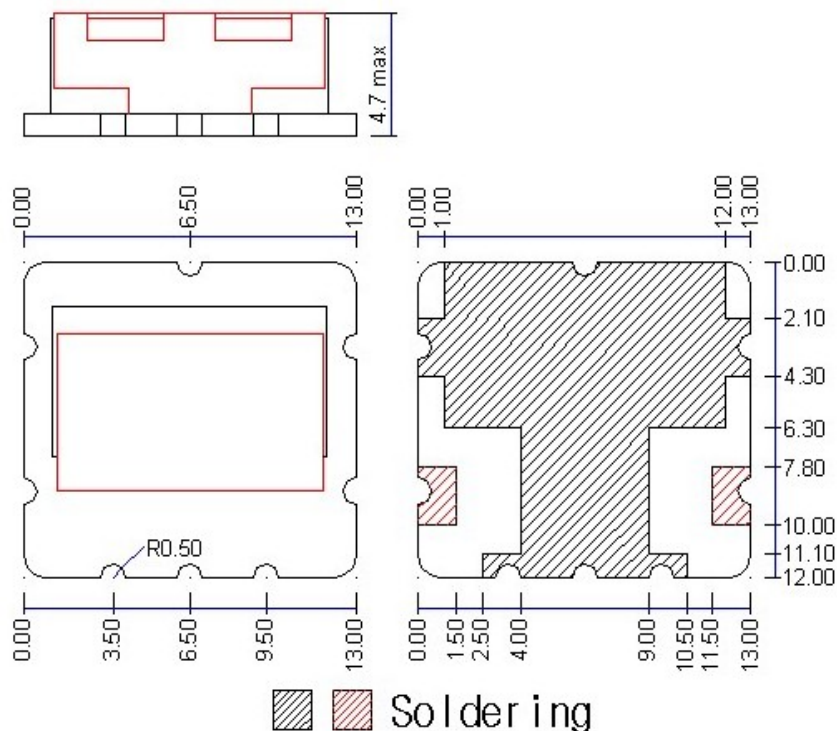

#### 4. TYPICAL CHARACTERISTIC

