


1. PART NO : R4D2345P30A1

2. ELECTRICAL SPECIFICATION

| ITEM | SPEC | UNIT |
|-------------------------------------|--------------|--------------|
| Center Frequency(Fo) | 2345 | MHz |
| Band Width(BW) | 2330~2360 | MHz |
| Insertion Loss | 2.5 | dB max |
| Ripple | 0.5 | dB max |
| Return Loss | 15.0 | dB min |
| ATTENUATION (absolute value) | at 2270MHz | 40.0 dB min |
| | at _____ MHz | _____ dB min |
| | at _____ MHz | _____ dB min |
| | at _____ MHz | _____ dB min |
| Operation Temperature Range | -30 ~ +80 | ℃ |
| Input Power | 2.0 max | W |
| In / Out Impedance | 50 | Ω |

3. DIMENSION

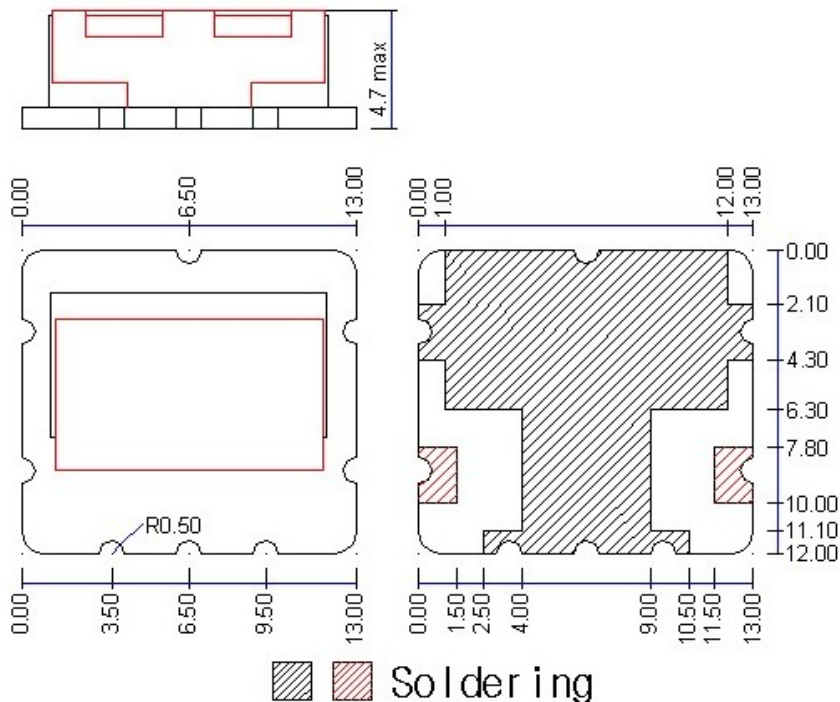

4. TYPICAL CHARACTERISTIC

