

Radio Frequency Global

#614, A Dong, Noblereach, 367-5, Yatap-Dong, Seongnam-si
tel : 031-702-5813 fax : 031-702-5814

www.rfg-korea.co.kr




1. PART NO : R4D704P12A1

2. ELECTRICAL SPECIFICATION

ITEM	SPEC	UNIT
Center Frequency(Fo)	704	MHz
Band Width(BW)	698~710	MHz
Insertion Loss	3.0	dB max
Ripple	0.5	dB max
Return Loss	18.0	dB min
ATTENUATION (absolute value)	at 728MHz	17.0 dB min
	at Fc+/- 75MHz	50.0 dB min
	at MHz	dB min
	at MHz	dB min
Operation Temperature Range	-30 ~ +80	℃
Input Power	2.0 max	W
In / Out Impedance	50	Ω

3. DIMENSION

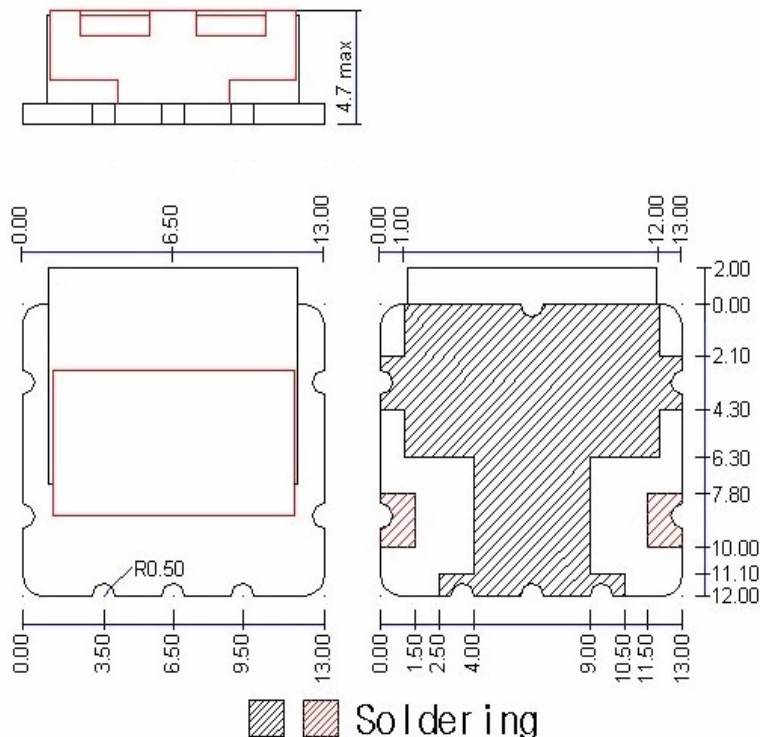

4. TYPICAL CHARACTERISTIC

