




1. PART NO : RFG_315/1025/1555 Triplexer

2. ELECTRICAL SPECIFICATION

ITEM	SPEC			UNIT
Center Frequency(Fo)	352(port1)	1025(port2)	1555(port3)	MHz
Band Width(BW)	315~390	970~1080	1500~1610	MHz
Insertion Loss	1.5	2.0	2.0	dB max
Ripple	0.5	0.5	0.5	dB max
Return Loss	15.0	15.0	15.0	dB min
ATTENUATION (absolute value)	at port 2 50	port1 50	port1 50	dB min
	at port 3 50	port3 45	port2 50	dB min
	at			dB min
	at			dB min
Operation Temperature Range	-30 ~ +80			℃
Input Power	2.0 max			W
In / Out Impedance	50			Ω

3. DIMENSION

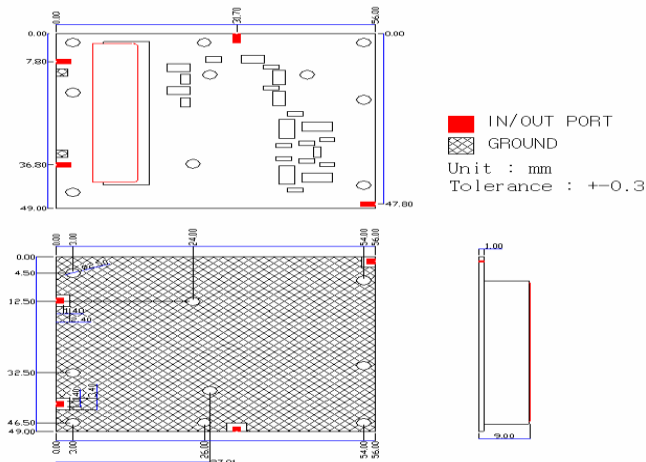

4. TYPICAL CHARACTERISTIC

