

R Radio Frequency Global

#614, A Dong, Noblereach, 367-5, Yatap-Dong, Seongnam-si
 tel : 031-702-5813 fax : 031-702-5814

www.rfg-korea.co.kr




1. PART NO : RFG_CDMA WCDMA Wibro-Triplexer

2. ELECTRICAL SPECIFICATION

ITEM	SPEC			UNIT
Center Frequency(Fo)	859(port1)	2035(port2)	2350(port3)	MHz
Band Width(BW)	824~894	1920~ 2150	2300~2400	MHz
Insertion Loss	0.8	1.5	1.5	dB max
Ripple	0.5	0.5	0.5	dB max
Return Loss	18.0	18.0	18.0	dB min
ATTENUATION (absolute value)	at port 2 40	por1 40	por1 40	dB min
	at port 3 40	por3 40	por2 40	dB min
	at			dB min
	at			dB min
Operation Temperature Range	-30 ~ +80			℃
Input Power	2.0 max			W
In / Out Impedance	50			Ω

3. DIMENSION

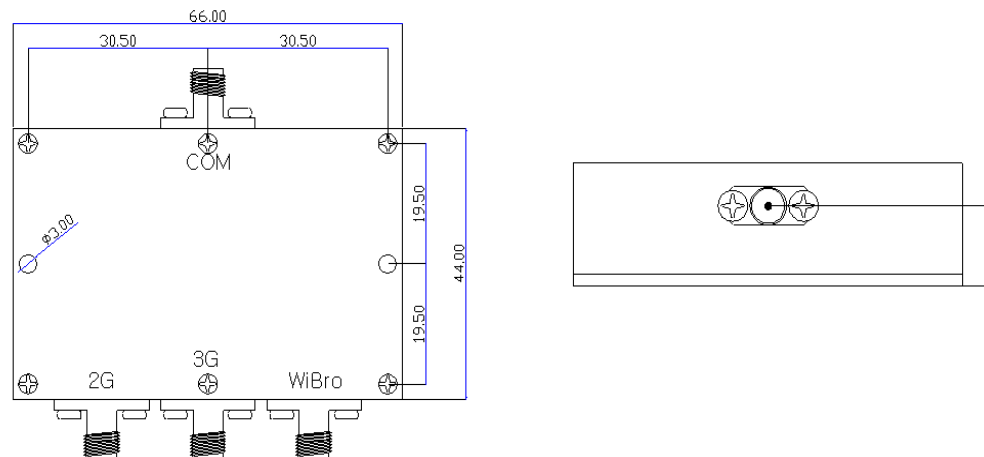

4. TYPICAL CHARACTERISTIC

