

Radio Frequency Global

#614, A Dong, Noblereach, 367-5, Yatap-Dong, Seongnam-si
tel : 031-702-5813 fax : 031-702-5814

www.rfg-korea.co.kr




1. PART NO : RL125B15AA

2. ELECTRICAL SPECIFICATION

| ITEM | SPEC | UNIT |
|-------------------------------------|-------------|-------------|
| Center Frequency(Fo) | 125 | MHz |
| Band Width(BW) | 117.5~132.5 | MHz |
| Insertion Loss | 2.0 | dB max |
| Ripple | 0.5 | dB max |
| Return Loss | 15.0 | dB min |
| ATTENUATION (absolute value) | at 242.5MHz | 50.0 dB min |
| | at | dB min |
| | at | dB min |
| | at | dB min |
| Operation Temperature Range | -30 ~ +80 | ℃ |
| Input Power | 2.0 max | W |
| In / Out Impedance | 50 | Ω |

3. DIMENSION

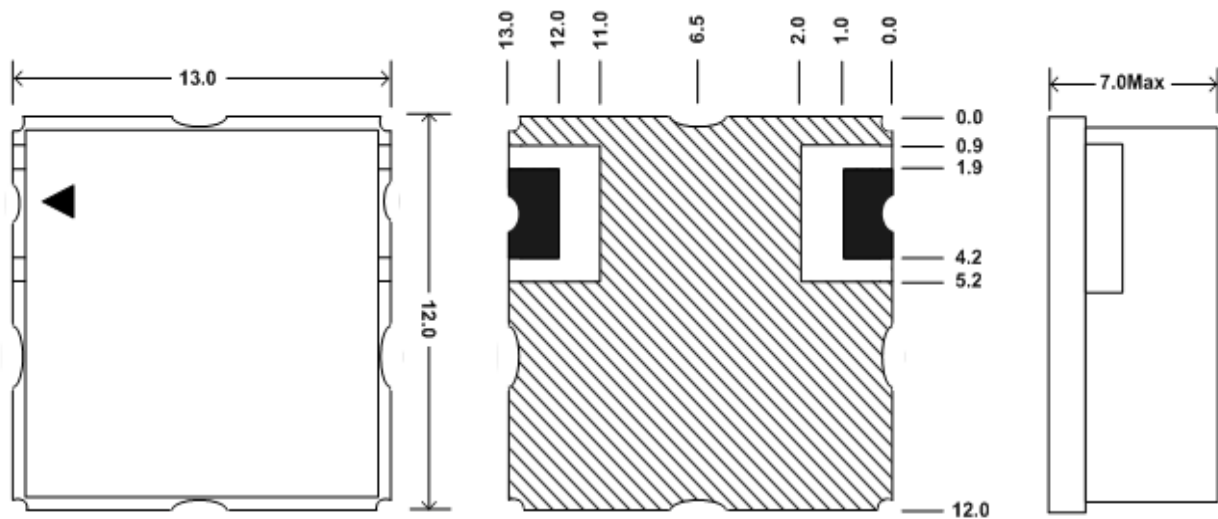

Unit : mm
Tolerance : +/- 0.3

4. TYPICAL CHARACTERISTIC

