

Radio Frequency Global

#614, A Dong, Noblereach, 367-5, Yatap-Dong, Seongnam-si
tel : 031-702-5813 fax : 031-702-5814

www.rfg-korea.co.kr




1. PART NO : RL125B30D

2. ELECTRICAL SPECIFICATION

ITEM	SPEC		UNIT
Center Frequency(Fo)	125		MHz
Band Width(BW)	110~140		MHz
Insertion Loss	2.0		dB max
Ripple	0.8		dB max
Return Loss	15.0		dB min
ATTENUATION (absolute value)	at	100MHz	13.0 dB min
	at	88.5MHz	35.0 dB min
	at		dB min
	at		dB min
Operation Temperature Range	-30 ~ +80		℃
Input Power	2.0 max		W
In / Out Impedance	50		Ω

3. DIMENSION

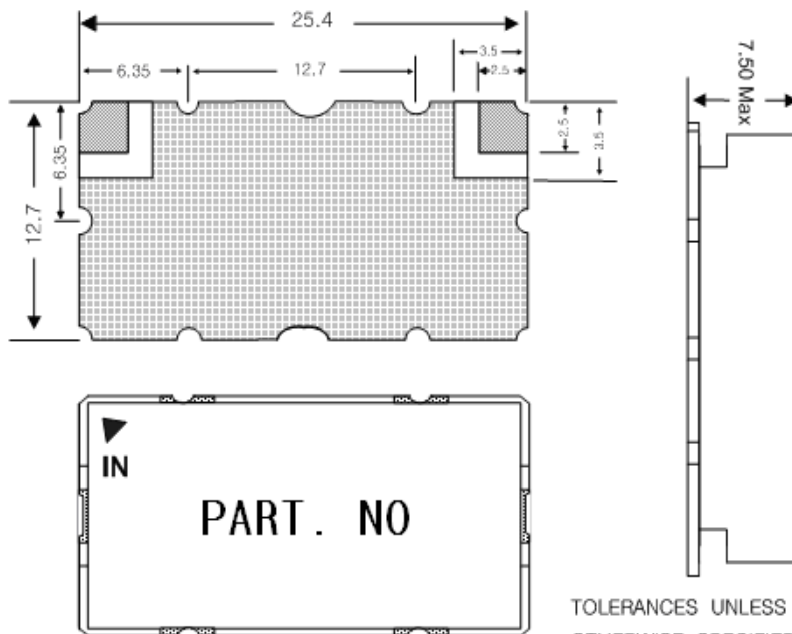

TOLERANCES UNLESS
OTHERWISE SPECIFIED : +/-0.3
UNIT: mm

4. TYPICAL CHARACTERISTIC

