




1. PART NO : RL20B20E


2. ELECTRICAL SPECIFICATION

ITEM	SPEC		UNIT
Center Frequency(Fo)	20		MHz
Band Width(BW)	15~25		MHz
Insertion Loss	2.0		dB max
Ripple	1.6		dB max
Return Loss	15.0		dB min
ATTENUATION (absolute value)	at	1MHz	55.0 dB min
	at	40MHz	55.0 dB min
	at	3000MHz	30.0 dB min
	at	MHz	dB min
Operation Temperature Range	-30 ~ +80		℃
Input Power	2.0 max		W
In / Out Impedance	50		Ω

3. DIMENSION

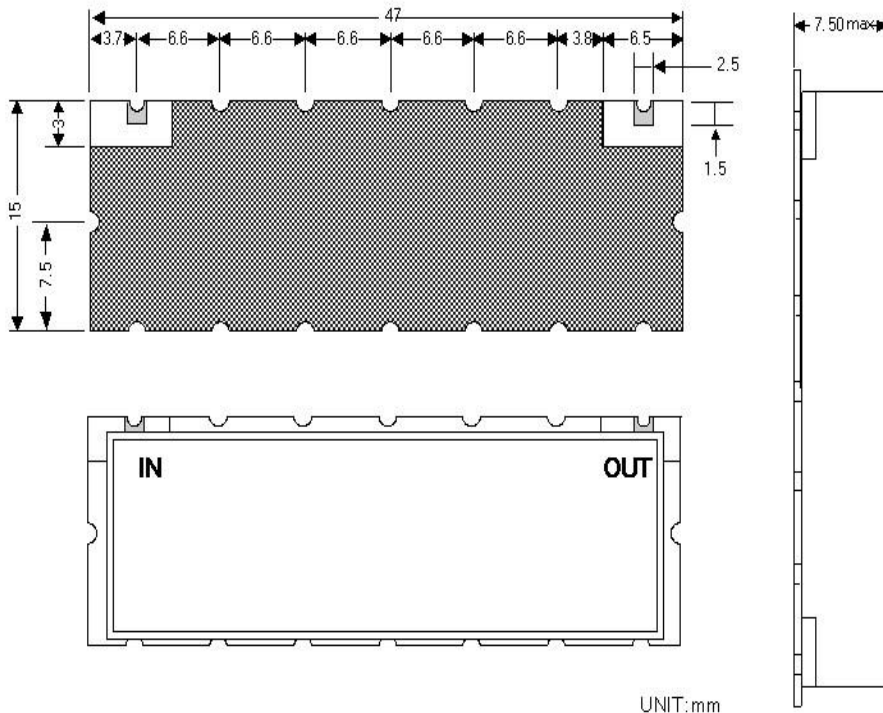

4. TYPICAL CHARACTERISTIC

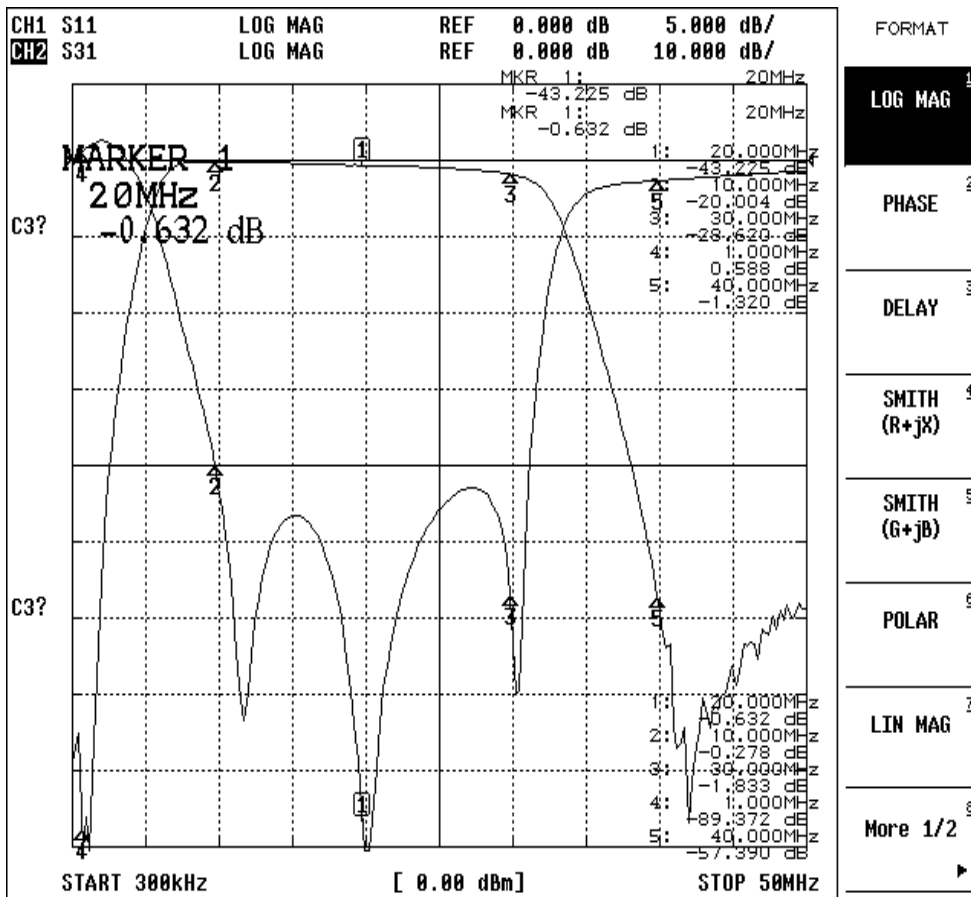

FORMAT

LOG MAG 1)

PHASE 2)

DELAY 3)


SMITH (R+jX) 4)

SMITH (G+jB) 5)

POLAR 6)

LIN MAG 7)

More 1/2 8)

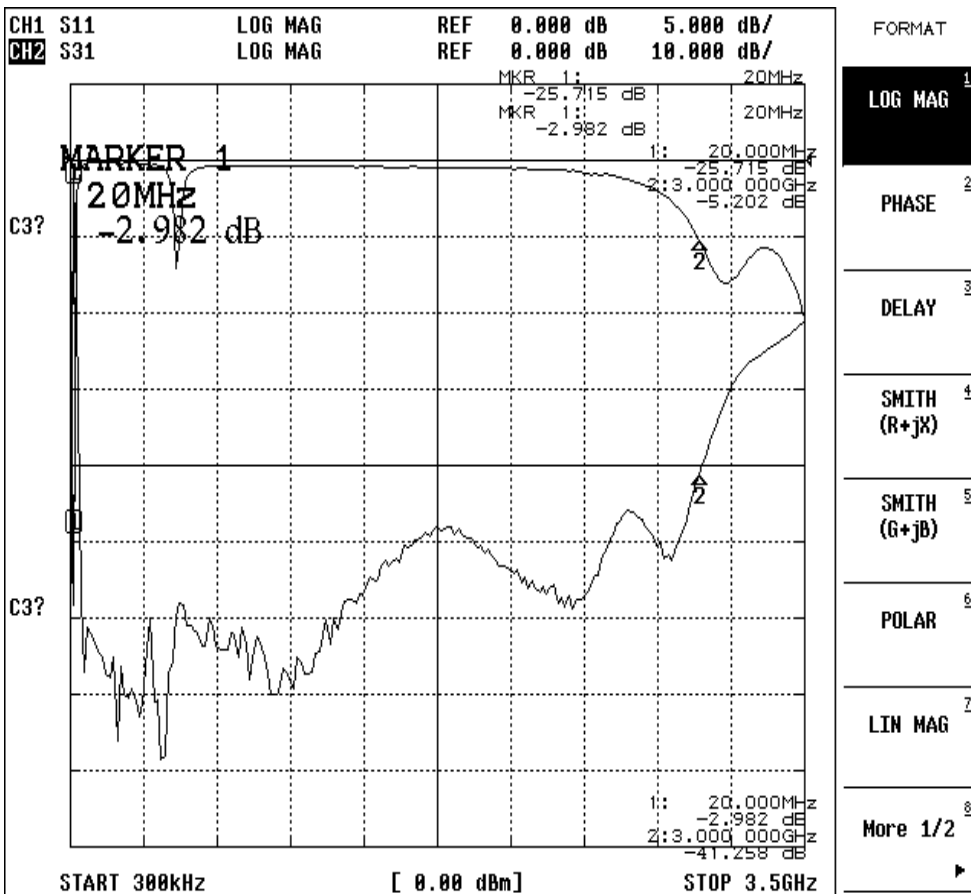

FORMAT

LOG MAG 1)

PHASE 2)

DELAY 3)

SMITH (R+jX) 4)

SMITH (G+jB) 5)

POLAR 6)

LIN MAG 7)

More 1/2 8)