

Radio Frequency Global

#614, A Dong, Noblereach, 367-5, Yatap-Dong, Seongnam-si
tel : 031-702-5813 fax : 031-702-5814

www.rfg-korea.co.kr




1. PART NO : RL255B30D

2. ELECTRICAL SPECIFICATION

ITEM	SPEC		UNIT
Center Frequency(Fo)	255		MHz
Band Width(BW)	240~270		MHz
Insertion Loss	2.5		dB max
Ripple	0.6		dB max
Return Loss	15.0		dB min
ATTENUATION (absolute value)	at	180MHz	50.0 dB min
	at	330MHz	40.0 dB min
	at		dB min
	at		dB min
Operation Temperature Range	-30 ~ +80		℃
Input Power	2.0 max		W
In / Out Impedance	50		Ω

3. DIMENSION

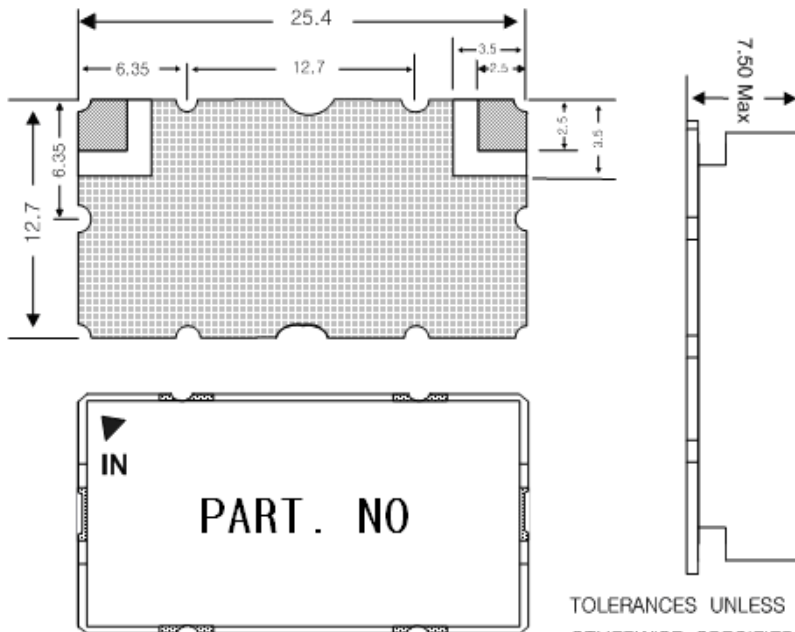

TOLERANCES UNLESS
OTHERWISE SPECIFIED : +/-0.3
UNIT: mm

4. TYPICAL CHARACTERISTIC

