



Radio Frequency Global

#614, A Dong, Noblereach,367-5, Yatap-Dong,Seongnam-si
tel : 031-702-5813 fax : 031-702-5814

www.rfg-korea.co.kr




1. PART NO : RL500HD

2. ELECTRICAL SPECIFICATION

ITEM	SPEC	UNIT
Cut off Frequency(Fo)	500	MHz
Band Width(BW)	500~2000	MHz
Insertion Loss	1.5	dB max
Ripple	1.0	dB max
Return Loss	10.0	dB min
ATTENUATION (absolute value)	at 400MHz	25.0 dB min
	at	dB min
	at	dB min
	at	dB min
Operation Temperature Range	-30 ~ +80	℃
Input Power	2.0 max	W
In / Out Impedance	50	Ω

3. DIMENSION

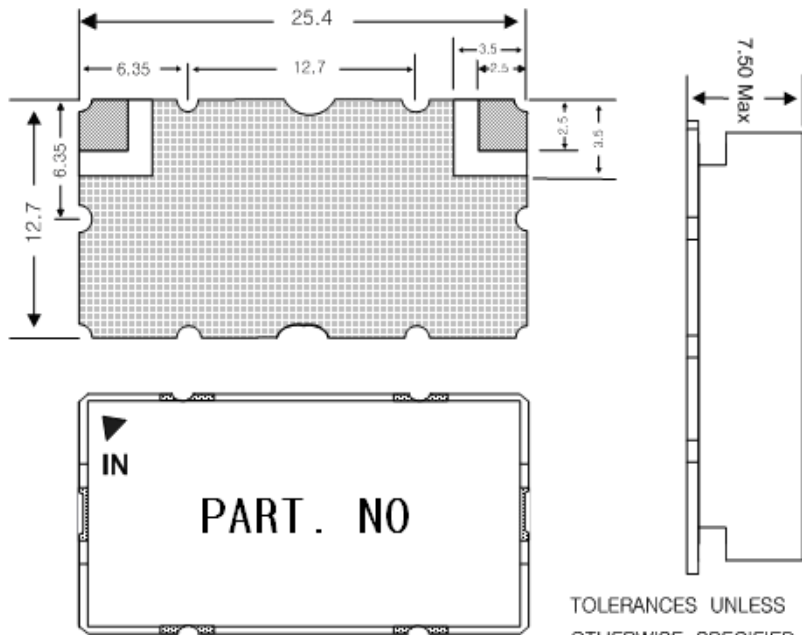

TOLERANCES UNLESS
OTHERWISE SPECIFIED : +/-0.3
UNIT: mm

4. TYPICAL CHARACTERISTIC

