

Radio Frequency Global

#614, A Dong, Noblereach, 367-5, Yatap-Dong, Seongnam-si
tel : 031-702-5813 fax : 031-702-5814

www.rfg-korea.co.kr




1. PART NO : RL62.5B20D

2. ELECTRICAL SPECIFICATION

ITEM	SPEC		UNIT
Center Frequency(Fo)	62.5		MHz
Band Width(BW)	52.5~72.5		MHz
Insertion Loss	2.0		dB max
Ripple	0.5		dB max
Return Loss	15.0		dB min
ATTENUATION (absolute value)	at	32.5MHz	50.0 dB min
	at	42.5MHz	20.0 dB min
	at	92.5MHz	30.0 dB min
	at	MHz	dB min
Operation Temperature Range	-30 ~ +80		℃
Input Power	2.0 max		W
In / Out Impedance	50		Ω

3. DIMENSION

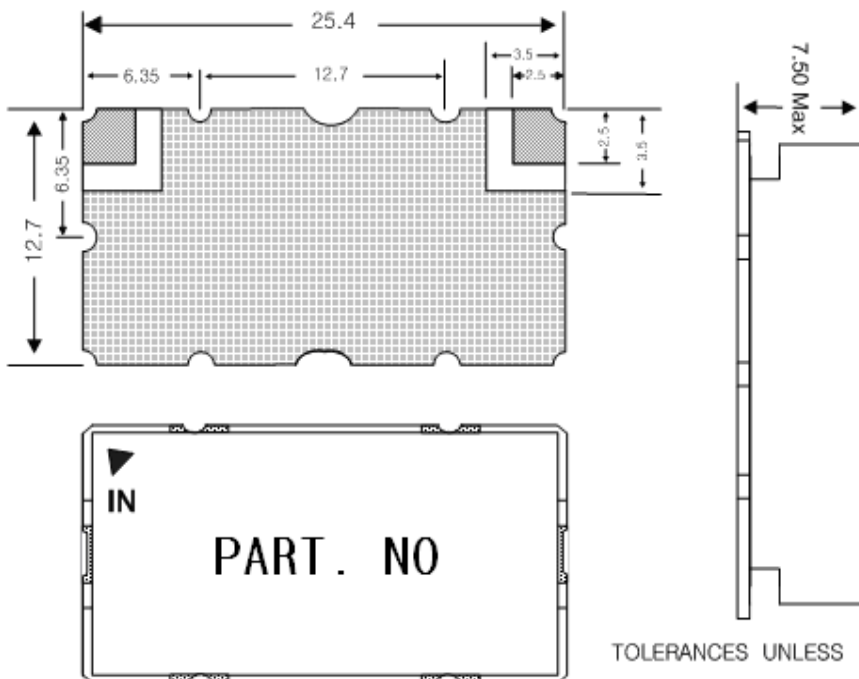

TOLERANCES UNLESS
OTHERWISE SPECIFIED : +/-0.3
UNIT: mm

4. TYPICAL CHARACTERISTIC

