

# Radio Frequency Global

#614, A Dong, Noblereach, 367-5, Yatap-Dong, Seongnam-si  
tel : 031-702-5813 fax : 031-702-5814

[www.rfg-korea.co.kr](http://www.rfg-korea.co.kr)




1. PART NO : RL75B15D

## 2. ELECTRICAL SPECIFICATION

ITEM	SPEC		UNIT
Center Frequency(Fo)	75		MHz
Band Width(BW)	67.5 ~82.5		MHz
Insertion Loss	2.0		dB max
Ripple	0.5		dB max
Return Loss	15.0		dB min
ATTENUATION  (absolute value)	at	57.5MHz	20.0 dB min
	at	50MHz	45.0 dB min
	at	92.5MHz	18.0 dB min
	at	100MHz	30.0 dB min
Operation Temperature Range	-30 ~ +80		℃
Input Power	2.0 max		W
In / Out Impedance	50		$\Omega$

## 3. DIMENSION

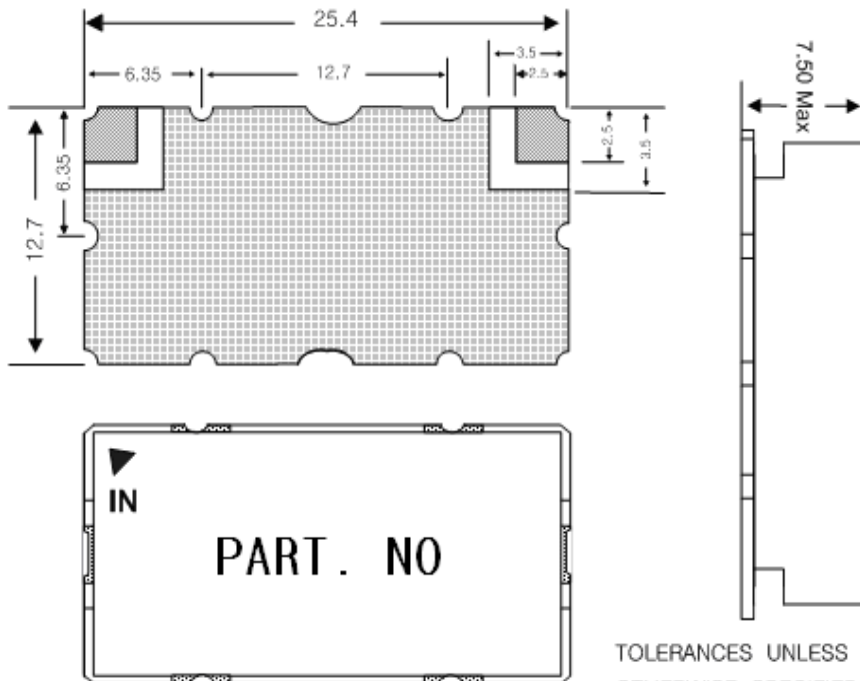

TOLERANCES UNLESS  
OTHERWISE SPECIFIED : +/-0.3  
UNIT: mm

## 4. TYPICAL CHARACTERISTIC

